





12,5 m	16,5 m
500 kg	250 kg

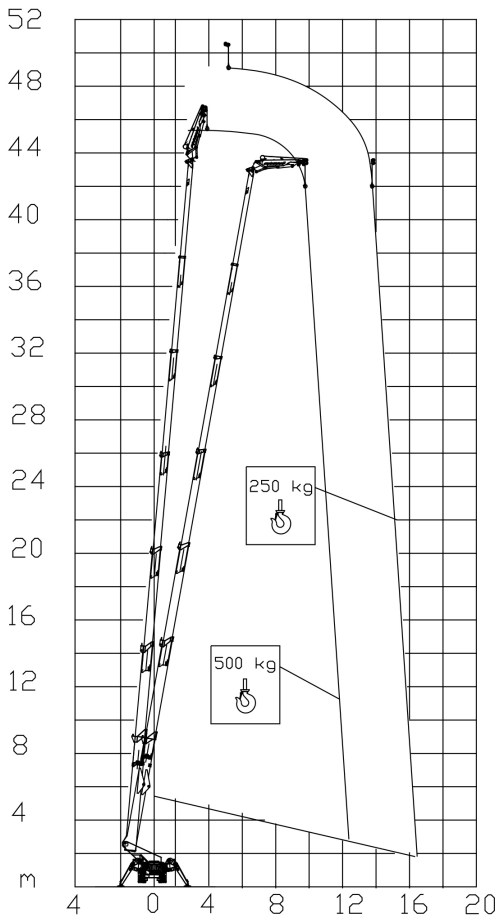

BI-ENERGY
Diesel+AC

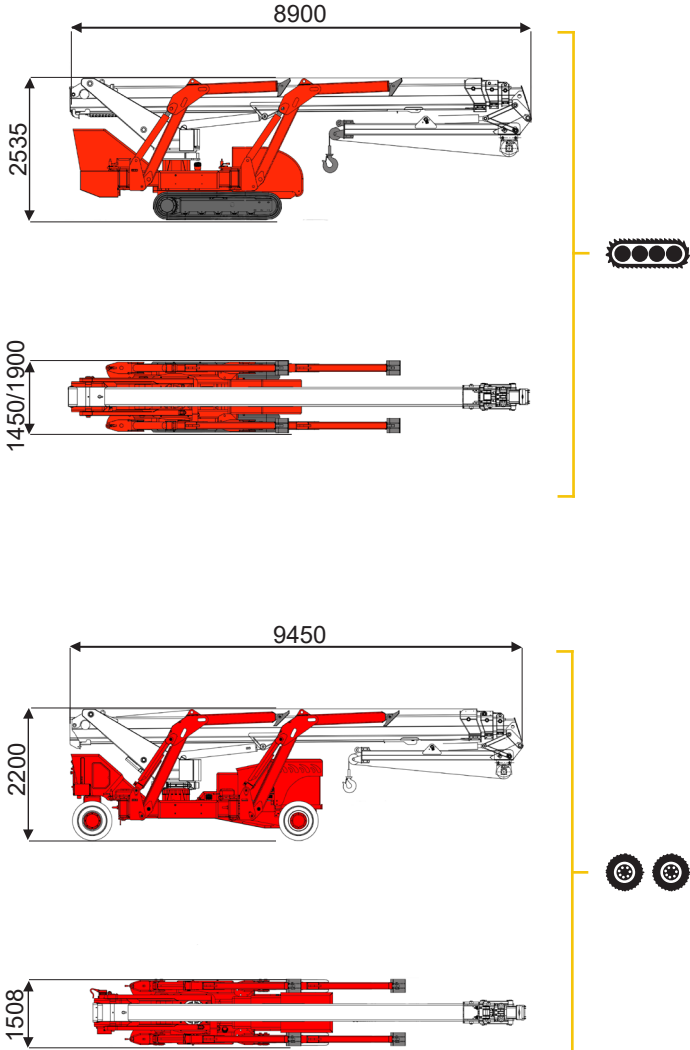

XTJ 52⁺/C



47 m

12,5 m

500 kg

660°

4,13-5,17 m

16%

42%

2 km/h

14980 kg

95 kN

4,49 kN/m²

7,01 kN/m²

XTJ 52⁺/R



51 m

16,5 m

500 kg

660°

4,13-5,17 m

16%

16%

1,2 km/h

13000 kg

95 kN

3,89 kN/m²

5,73 kN/m²

Available version:

BI-ENERGY (DIESEL+AC)
ECO (DC+AC)
HYBRID (DIESEL+DC)

Characteristics and technical data are informative only and subjected to change without notice.

Palazzani
INDUSTRIE

COMPANY WITH
QUALITY SYSTEM
CERTIFIED BY DNV GL
= ISO 9001 =

Palazzani Industrie S.p.A.
Via del Pavione, 4 - 25050 - Paderno F.C. (BS) - Italy
Tel. (+39) 0306857073
platforms@palazzani.it
www.palazzani.it

