

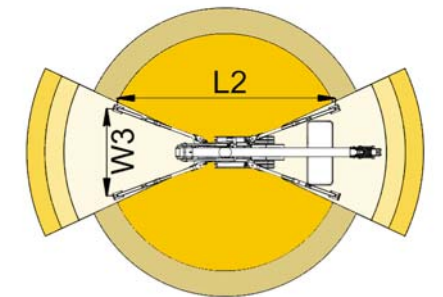
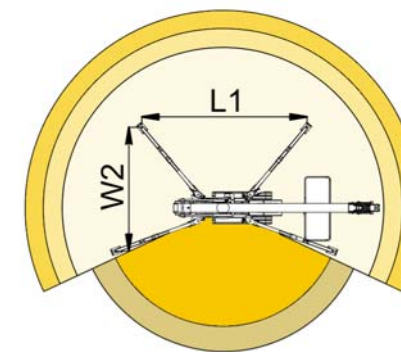
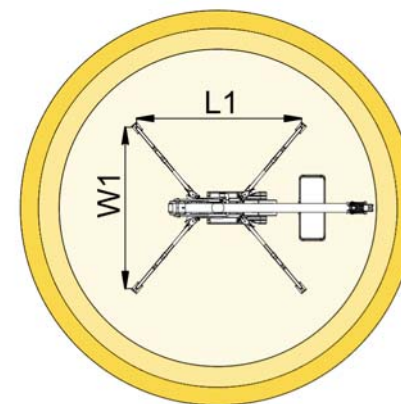


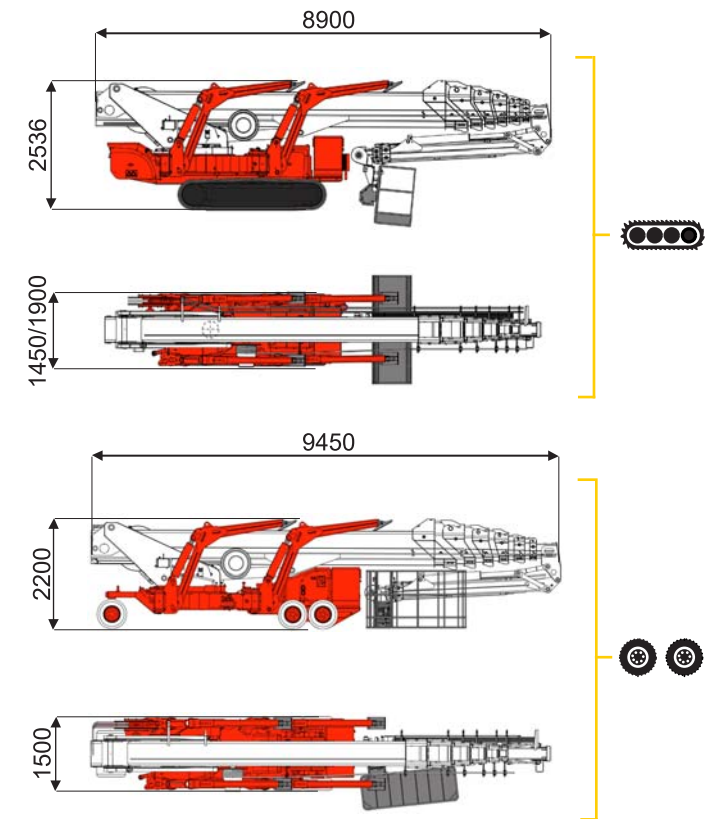

52 m ↑
19,5 m →
400 Kg*

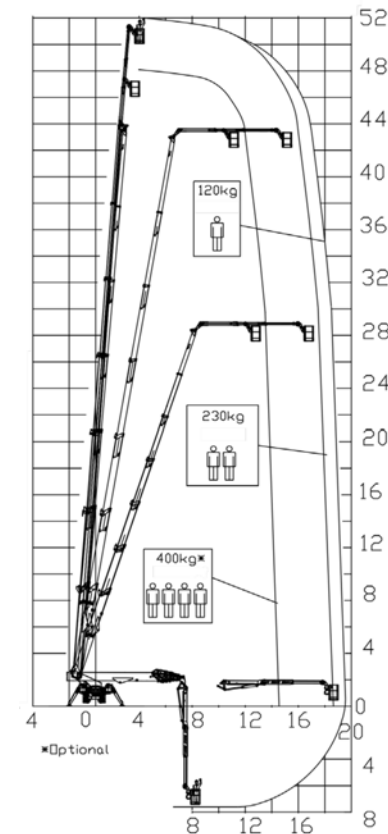

16,5 m	18,5 m	19,5 m	14,5 m	16,5 m	L1	L2	W1	W2	W3
400 kg*	230 kg	120 kg	400 kg*	120/230 kg	6460 mm	7190 mm	5170 mm	4655 mm	4130 mm

BI-ENERGY
Diesel+AC



XTJ 52 ⁺ /C		52 m	19,5 m	400 kg*	170°	660°	240x70 cm	90°+80°	4,13-5,17 m	16%	42%	2 km/h	14890 kg	95 kN	4,46 kN/m ²	6,97 kN/m ²
XTJ 52 ⁺ /R		52 m	19,5 m	400 kg*	170°	660°	240x70 cm	90°+80°	4,13-5,17 m	16%	21%	1,2 km/h	13000 kg	95 kN	3,89 kN/m ²	5,73 kN/m ²



Available version:

BI-ENERGY (DIESEL+AC)
ECO (DC+AC)
HYBRID (DIESEL+DC)

Characteristics and technical data are informative only and subjected to change without notice.



51 m ↑
16,5 m →
500 Kg ⚙

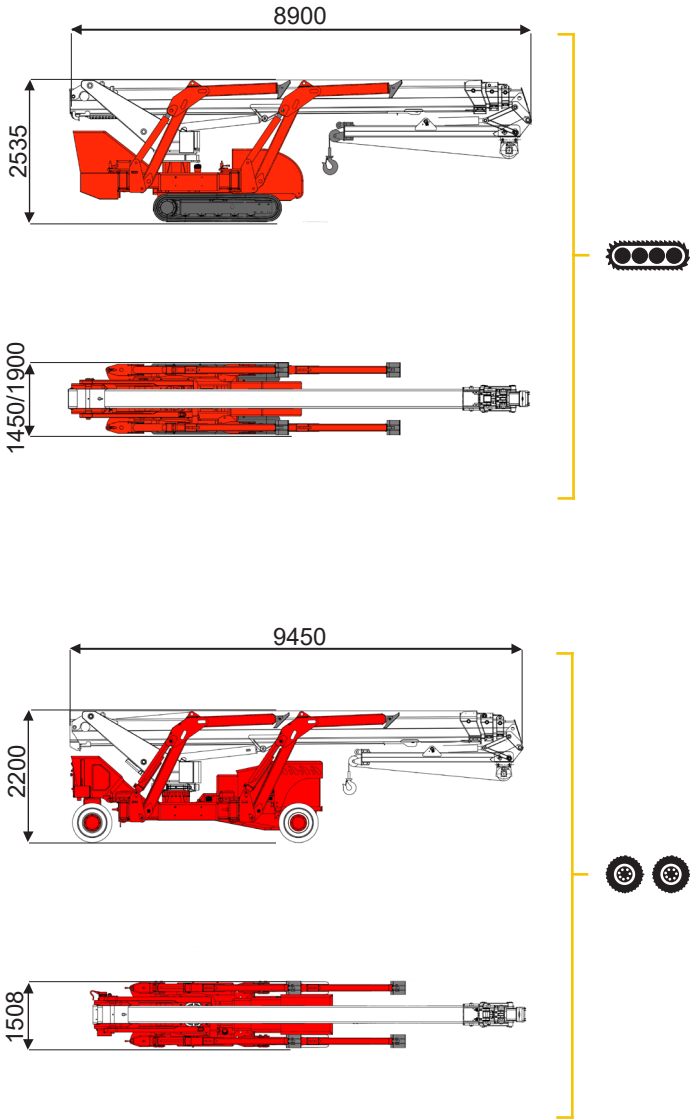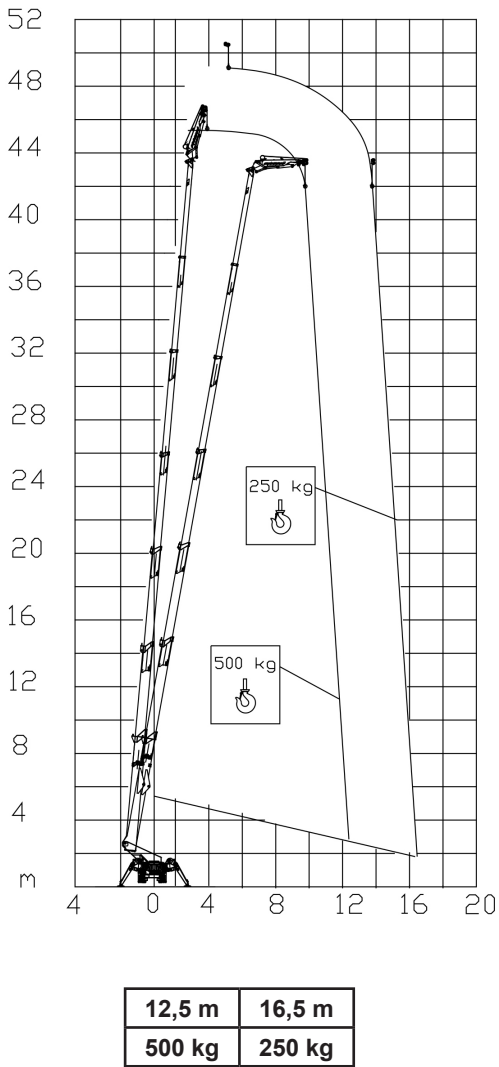

BI-ENERGY
Diesel+AC



XTJ 52⁺/C



47 m

12,5 m

500 kg

660°

4,13-5,17 m

16%

42%

2 km/h

14980 kg

95 kN

4,49 kN/m²

7,01 kN/m²

XTJ 52⁺/R



51 m

16,5 m

500 kg

660°

4,13-5,17 m

16%

16%

1,2 km/h

13000 kg

95 kN



3,89 kN/m²

5,73 kN/m²

Available version:

BI-ENERGY (DIESEL+AC)
ECO (DC+AC)
HYBRID (DIESEL+DC)

Characteristics and technical data are informative only and subjected to change without notice.

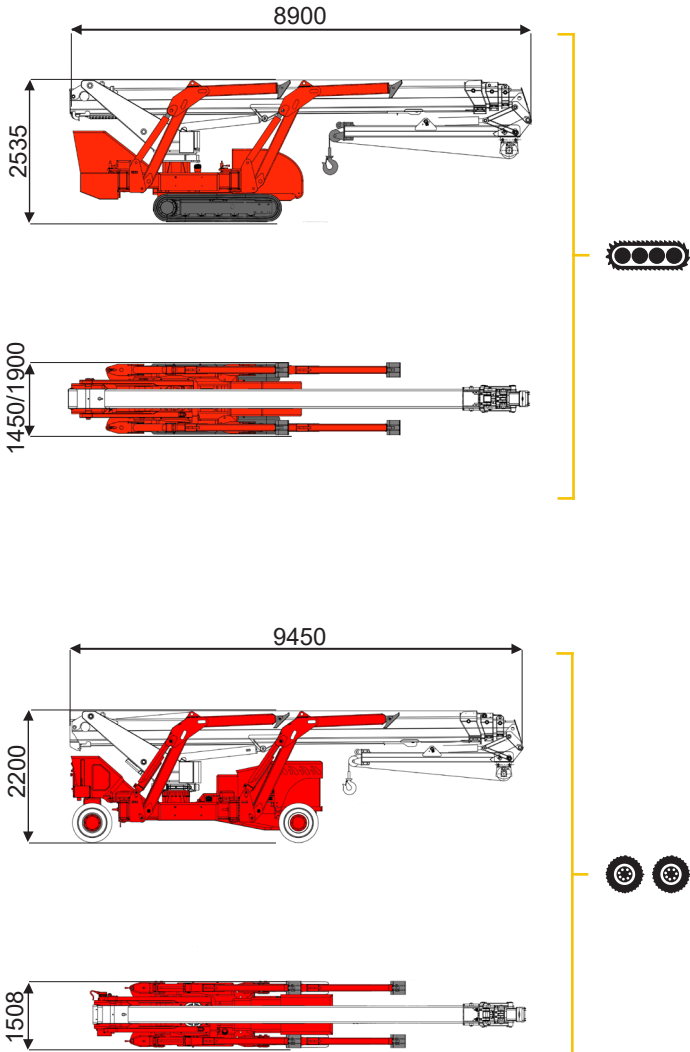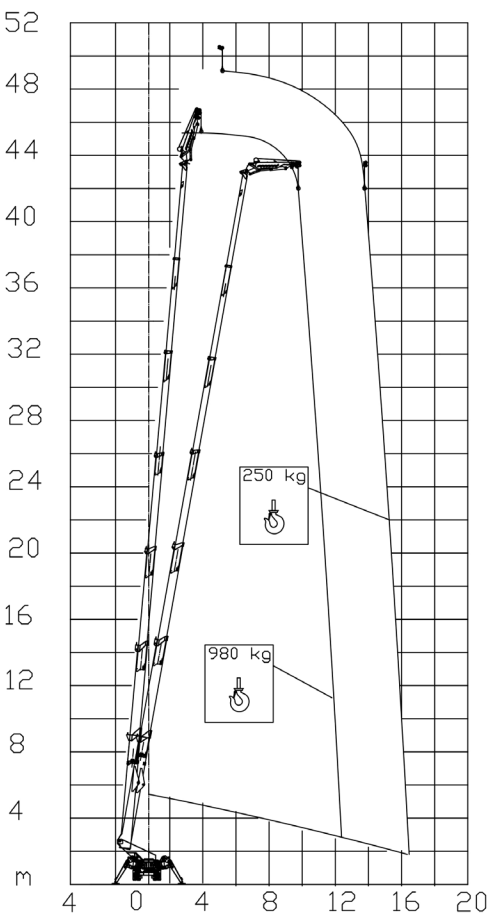

BI-ENERGY
Diesel+AC



XTJ 52⁺/C



47 m

12,5 m

980 kg

660°

4,13-5,17 m

16%

42%

2 km/h

14980 kg

95 kN

4,49 kN/m²

7,01 kN/m²

XTJ 52⁺/R



51 m

16,5 m

980 kg

660°

4,13-5,17 m

16%

16%

1,2 km/h

13000 kg

95 kN

3,89 kN/m²

5,73 kN/m²

Available version:

BI-ENERGY (DIESEL+AC)
ECO (DC+AC)
HYBRID (DIESEL+DC)

Characteristics and technical data are informative only and subjected to change without notice.

Palazzani
INDUSTRIE

COMPANY WITH
QUALITY SYSTEM
CERTIFIED BY DNV GL
= ISO 9001 =

Palazzani Industrie S.p.A.
Via del Pavione, 4 - 25050 - Paderno F.C. (BS) - Italy
Tel. (+39) 0306857073
platforms@palazzani.it
www.palazzani.it

