

Mseries

Robust. Reliable. And ready for the job.



**WACKER
NEUSON**
all it takes!

Multifunction Floodlight Tower MLE415

This Wacker Neuson compact size and light weight light tower offers outstanding performance and a high degree of safety, yet at a most competitive price, thus providing you the best return of investment.

Using modular LED lights with long lifetime, the ML series is an excellent choice for lighting construction sites, municipal road maintenance, commercial landscaping and wherever reliable and safe mobile lighting is needed.



NEW

MLE415



Modular LED for efficient light coverage (3,800 m² at average 10 lux) and long lifetime (50,000 hours).

Long durable design:

LED perfectly protected by cast aluminium housing and frame. LED can be easily replaced when broken.



Excellent wheel and turning radius.

12 inch solid Polyurethane wheels that can withstand harsh jobsite conditions.




Water and dust proof **switch box.**



Slanted lamp heads design

360° adjustable lamp heads to ensure best light distribution. Easily adjustable without tools.

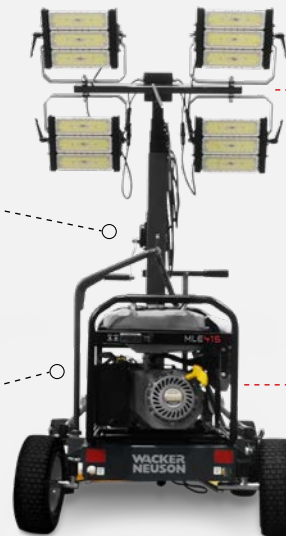

5 section mast with maximum height of 5 meters

Easy to operate wind stabilizer which allows operating at winds up to 57 km/hr with mast at full heights of 5 meters.*



Benefits of Light Tower MLE415 at a glance:



Long LED lifetime
up to 50,000 hours



Excellent coverage
3,800 m² (average 10 luxes)



Fuel efficient
0.6 l/h (with MG3)



Great stability
Wind stability up to 57 km/hr at maximum height of 5 m (with MG3)



SPECIFICATIONS	UNIT	MLE415
Net weight (without generator)	kg	123
L x W x H (in transportation position)	mm	1,170 x 835 x 1,950
Max. mast height	m	5
Lamp type	-	4 x 150W LED (4 x 150W)
Initial luminous flux	lm	90,000
Voltage	V	100~240
Frequency	Hz	50/60
Operation temperature	°C	-5~+40
Ingress Protection rating	-	IP44 (lamp is IP67)
Recommended generator	-	MG3/MG2i
Max. continuous running time	Hrs	24 hrs w/MG3 (15 liters fuel)

Data is calculated when equipped with MG3

www.wackerneuson.com/m